

## PROTEIN SEPARATION FROM FERMENTATION BROTH (ECOLI) USING POLYETHERSULFONE UF AND MF MEMBRANES

Prafulla. G. Bansod<sup>1</sup>, V.S.Sapkal<sup>2</sup>

<sup>1</sup>Sant Gadge Baba Amravati, university, Maharashtra (India). Vice chancellor of Nagpur, University

<sup>2</sup>Department of Chemical Technology University Amravati.

**Abstract.** In this paper, the intracellular Ecoli fermentation broth was developed in fermentor. The broths were separated using 0.2µm microfiltration polyethersulfone membranes. The Cells of Ecoli was retained in microfiltration membrane, were broken in high pressure homogenization. The cells debris and protein were separated using polyethersulfone 0.2µm PES Microfiltration membranes. In microfiltration, cells of Ecoli were rejected and proteins collected in permeate sides. After microfiltration, 30KD Ultra filtration membrane was used to separate proteins. About 91.01 % of the proteins were separated by the ultra filtration polyethersulfone membrane.

**Keywords.** Ultrafiltration, microfiltration. Polyethersulfone, Fermentation, high pressure homogenization.

### 1, Introduction

Synthetic polymers such as polysulfone, polyethersulfone, polycarbonate, polyamide, Cellulose acetate etc. are widely used for the preparation of membranes. Polyethersulfone (PES) is a favorable material for membranes as it has properties like resistance to oxidation, acids and alkalis, and excellent biocompatibility. PES has better solubility as compared with polysulfone [1-4]. The wettability of PES can be improved and its biocompatibility enhanced by adding poly (vinyl pyrrolidone) (PVP). This also increased the diffusive transport properties of solute through the membrane. E. coli are commonly used hosts for recombinant product expression because of their ability to produce large quantities of protein quickly and economically. During the past twenty-five years, regulatory requirements have directed industry to use modern technology to improve process purity and control. In the same period, the protein industry has become focused on process efficiency, speed, yield and cost. Centrifugation has remained, essentially unchanged since the mid1950s; however recent advances in membrane technologies have facilitated improvements in process purity, control, efficiency, speed, yield and cost. Cell harvesting, clarification of broth, recycling of cells and separation of cell debris from extracellular products represent

important potential applications of membrane technology in the emerging field of biotechnology (1-5). Membrane separation is a very advanced separation technique as compared to convectional separation method such as rotary filter, sedimentation and centrifugation etc. The importance of the membrane process is due to less energy requirement & workability at ambient temperature & pressure, clean technology with ease operation, produce high quality products, greater flexibility in designing system. The types of membrane operation like UF, MF have wide variety of application in fermentation downstream operation treatment in biopharmaceuticals industries for recovery & separation of valuable components. Typically, a separation specialist takes on the challenge of designing steps to separate the various components of a complex fermentation broth that the fermentation-process designers included to maximize fermentation performance. Hence, if the required separation becomes complex and costly, the most efficient fermentation may not necessarily yield the optimum overall process. Typically, 50-70% of the total production cost in classical processes is due to downstream processing, whereas in fermentation that employs recombinant DNA, the fraction can reach up to 80-90%. This large percentage is often due to

separation and purification of the fermentation product.

Escherichia coli are widely used for the expression of mammalian and bacterial proteins. Over expression of these recombinant proteins in E. coli often results in the formation of insoluble protein inclusion bodies (1-7). The first step in the recovery of the intracellular recombinant protein, whether soluble or insoluble, typically involves cell disruption. On a large scale, cell disruption is usually done with either a high pressure homogenizer or a bead mill (1-12). Increasing the number of passes through a high pressure homogenizer causes greater protein release,

In this paper, E coli fermentation broth is separated using 0.2µm microfiltration polyethersulfone membranes. Cells of ecoli separated from microfiltration passes through high pressure homogenizer. Again 0.2µm microfiltration membranes used to separate cells debris in retained and permeate are feed to 30KD UF membrane to separate proteins.

**2. Materials and methods**

Polyethersulfone membrane of molecular weight cut off 30KD, membrane assembly, fermented broth of ecoli, alkaline sodium carbonate solution (20g/lit Na2CO3 in 0.1 mol/lit .Copper sulphate-sodium potassium tartrate solution (5g/lit CuSO4.5H2O in 10 g/lit Na, K tartrate). Folin- cicalteau reagent. Standard protein (Albumin solution 0.2 mg/ml)

**2.1, Experimental work**

Fermented broth (E-coli) was used as a feed for (MF/UF) cross flow membrane system. Recovery of protein from the E-coli (fermented broth) involved a number of steps:

- 1) Microfiltration
- 2) Homogenization
- 3) Microfiltration
- 4) Ultra filtration

Seven liter intracellular Ecoli fermentation broth was feed to 0.2µm polyethersulfone microfiltration membrane to concentrate cells of ecoli. Concentrated cells were disrupted in homogenizer to separate out intracellular protein. Cell debris and protein were again separated using polyethersulfone 0.2µm MF membranes. Cell debris as retained and

proteins in permeate sides of the membranes. Finally proteins were separated in 30KD ultra filtration polyethersulfone membranes. The concentration of proteins are determined by

**Lowry’s method**

**Microfiltration**

- 1) Microfiltration: Membrane polyethersulfone 0.2µm

Sr. No	Feed flow rate (L/m <sup>2</sup> min)	Permeate flow rate(L/m <sup>2</sup> min)	Concentrated flow rate (L/m <sup>2</sup> min)	Inlet press (Bar)	Outlet press (Bar)	TMP	% Recovery
01	126.25	63.25	62.5	1.2	0.6	0.9	50.49
02	129.47	69.479	60	1.4	0.8	1.2	52.66
03	126.354	71.35	55	1.7	0.1	1.35	56.47

- 2) Microfiltration. Feed (cell debris + protein) =2.635L

Sr. no	Feed flow rate (L/m <sup>2</sup> min)	Permeate flow rate (L/m <sup>2</sup> min)	Concentrated flow rate (L/m <sup>2</sup> min)	Inlet press (Bar)	Outlet press (Bar)	TMP	% Recovery
01	127.08	65.83	61.25	1.2	0.6	0.9	51.80
02	128.64	71.145	57.5	1.4	0.8	1.1	55.30
03	127.5	75	52.5	1.7	1	1.35	58.82

- 3) Ultra filtration. Feed 2.185L

Sr. No	Feed flow rate (L/m <sup>2</sup> min)	Permeate flow rate (L/m <sup>2</sup> min)	Concentrated flow rate(L/m <sup>2</sup> min)	Inlet press (Bar)	Outlet press (Bar)	TMP	% Recovery
01	130.104	67.5	62.5	1.2	0.4	0.8	51.96
02	132.08	70.83	61.25	1.4	0.6	0.1	53.62
03	128.75	72.5	56.25	1.7	1.3	1.3	56.31

**3. Result and discussion**

Polyethersulfone microfiltration 0.2µm membrane was used for concentrating and separating cells of E-coli -fermented broth. Seven liters E-coli -fermented broth [7L] were used as a feed for microfiltration membrane, where cells of E-coli were concentrated (635ml) and 6.325 L as permeated. The concentrated (0.635 L) cells were passed in high pressure Homogenizer, where intracellular proteins given out from the cells. After Homogenization, cell debris and proteins were separated in 0.2µm microfiltration membranes.2.185L protein were collected in permeate sides and 0.410L cells debris collected in retained sides of microfiltration membranes. The permeate which were

collected in microfiltration were passed to 30KD PES ultra filtration membranes. The total proteins concentration in permeate were estimated by using Folin-Lowry method of protein assay .The proteins concentration of feed to 30KD UF membranes were found 845µg/ml and in permeated sides 75µg/ml.The total proteins rejected was found out to be 91.01 percentages in 30 KD polyethersulfone ultra filtration membranes.

The fig. 1 shows that, when transmembrane pressure increased concentrate flow rate decreased, whereas in Fig 2, showed that when transmembrane pressure increased permeate flow rate also increased continuously .After some times, it was found that permeate flow rate decreased with increase in transmembranes pressure. The resistance creates due to fouling and plugging problems of the membrane and permeates flux decreased

#### Conclusion

Ecoli fermentation broth was developed and separated using 0.2µm polyethersulfone microfiltration membranes. The concentrated cells were passed to high pressure homogenizer where intracellular proteins separated out. The cell debris separated using 0.2µm PES microfiltration membranes as retained and proteins collected as permeate side. The proteins were separated in 30KD PES ultra filtration membrane. The total 90.01% proteins separated using polyethersulfones UF membranes. Ultra filtration can be successfully used to separate protein and bacteria cells from Ecoli fermentation broth. Cells and proteins were retained by the ultra filtration membrane with MWCO of 30,000 Daltons. Increased transmembrane pressures caused higher permeate flux.


#### Acknowledgement

We greatly acknowledge the support from Dr. V.S.Sapkhal for guidance about the research topic and Sant Gadge Baba Amravati, university


#### 4. References

1. Bailey, F.J., Warf, R.T, Maigetter, R.Z (1990) Harvesting recombinant microbial cells using cross flow filtration. *J.Enz Microbe Techno* 12:647-652.
2. Forman, SM; DeBernardez, ER; Feldberg, RS; and Swartz, RW(1990) Cross flow filtration for the separation of inclusion bodies from soluble proteins in recombinant *Escherichia coli* cell lysate. *J. Membrane Sci* 48:263-279.
3. Meagher, MM; Bartlett, RT; Rai, VR and Khan, FR.(1994) The extraction of rIL-2 inclusion bodies from *Escherichia coli* using cross-flow filtration. *Journals of Biotechnology. Bioeng* 43:969-977.
4. Kroner K.H, Nissen N, Ziegler H. (1987) Improved dynamic filtration of microbial suspensions. *Journals of Bio/technology* 5:921-926.
5. Su, Z.G; and Colton, C.K.(1994) Cross flow membrane filtration, in Harrison, RG (Ed.), *Protein Purification Processing Engineering*, Marcel Dekker, New York, NY 1994.
6. Gyure D.C. (1992) set realistic goals for cross flow filtration. *Journals of Chem. Eng Prog* Nov.:66,
7. Tanaka, T; Kamimura, R; Fujiwara, R; and Nakanishi, K.(1994) Cross flow filtration of yeast broth cultivated in molasses, *Journals of Biotechnology. Bioeng* 43:1094-1101.
8. Schlegel, VL; and Meagher, MM. Effects of different membrane modular systems on the performance of cross flow filtration of *Pichia pastoris* Suspensions. *Journal of Membrane Separations in Biotechnology*, Marcel Dekker, New York, New
09. Marston, F. A. O. (1986). The purification of eukaryotic polypeptides synthesized in *Escherichia coli*. *Journals of Biochem. J.* 240: 1–12. York 2001.
10. Engler, C. R. (1990). Cell disruption by homogenizer, J. A.Asenjo (ed.), *Separation processes in biotechnology*. Marcel Dekker, New pp. 95–105
- 11, Bailey, S. M., Blum, P., Meagher, M. M.(1995). Improved homogenization of recombinant *Escherichia coli* following pretreatment with guanidine HCl.*Journals of Biotechnology. Prog.* 11: 533–539.
- 12, Baker, R. J., Fane, A. G., Fell, C. J. D., Yoo, B. H. (1985). Factors affecting flux in cross flow filtration. *Desalination* 53: 81–93.genizers. *Biotechnology. Bioeng.* 36: 1083–1089.


PROTEIN SEPARATION FROM FERMENTATION BROTH (ECOLI)

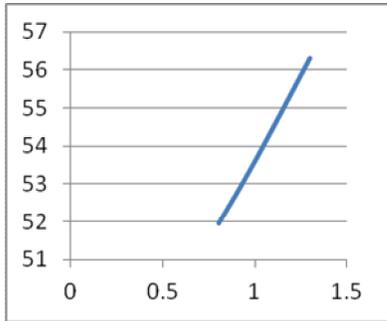

**Fig 1. Trans membrane pressure Vs concentrate flux.**

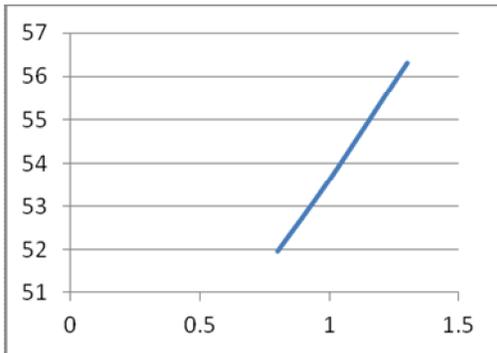

**Fig 2. TMP Vs permeate flux**

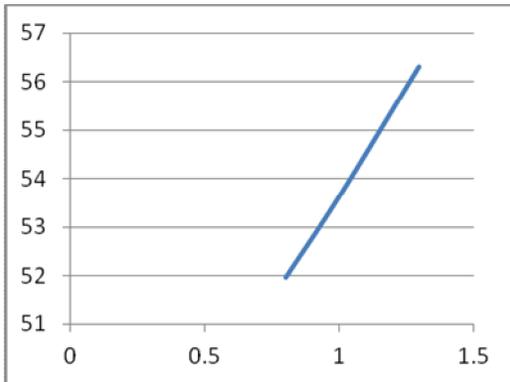

**Fig.3, TMP Vs Permeate Recovery**